

## Technical Data

## Materials

Body	Brass Nickle Plated
Cap	Brass Nickle Plated
Seal	CR (Chloroprene Rubber)
Clamp Insert	Polyamide 6
O-Ring	NBR

Flammability V2 (According to UL94)


Protection Class IP68 - 5 bar

Operating Temperature

Permanent -20 C up to +100 C

Intermittent -40 C up to +150 C

Attachment Thread EN 60423

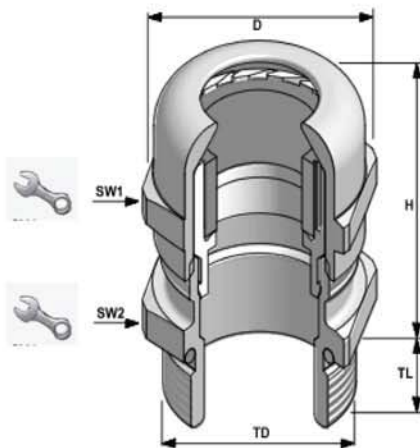

Thread Type	Cable Dia. mm	TL mm	TD mm	SW 1 mm	SW 2 mm	Max. H mm	D mm	Model
M12x1.5	3.0 - 6.5	6.0	12.0	14.0	14.0	21.5	15.5	BMBC-0S
		12.0						BMBC-0S
M16x1.5	5.0 - 10.0	6.5	16.0	20.0	20.0	24.0	22.0	BMBC-01S
		12.0						BMBC-01S
M20x1.5	6.0 - 12.0	8.0	20.0	22.0	22.0	24.3	24.5	BMBC-02
		12.0						BMBC-02
M25x1.5	12.0 - 18.0	8.0	25.0	30.0	30.0	29.5	33.0	BMBC-03S
		12.0						BMBC-03S
M32x1.5	17.0 - 24.0	9.0	32.0	40.0	40.0	35.0	44.5	BMBC-04S
		15.0						BMBC-04S
M40x1.5	22.0 - 32.0	8.0	40.0	50.0	50.0	42.0	55.5	BMBC-05S
		15.0						BMBC-05S
M50x1.5	29.0 - 40.0	9.0	50.0	64.0	68.0	49.0	70.0	BMBC-06S
		15.0						BMBC-06S
M63x1.5	37.0 - 53.0	10.0	63.0	75.0	75.0	54.0	83.0	BMBC-07S
		18.0						BMBC-07S