

Special design cable glands with a split rubber seal. The cap and body holes are big enough to accept the RJ-45 connector. On the other hand the rubber inner diameter is small enough to provide a good seal, while a split still allows for cable insertion. During the application, the design supports assembly without having to disassemble the RJ-45 connector from the cable. This feature is also supported by the brass or EMC cable glands.

Technical Data

Materials

Body	PA6 (Polyamide 6)
Cap	PA6 (Polyamide 6)
Seal	CR (Chloroprene Rubber)
O-Ring	NBR


Flammability V2 (According to UL94)

Protection Class IP68 - 5 bar

Operating Temperature

Permanent	-20 C up to +100 C
Intermittent	-30 C up to +150 C

Thread Type	TD mm	TL mm	H mm	SW mm	a mm	A mm	d mm	D mm	h mm	Model	
										Dark Gray RAL7001	Black RAL9005
M20x1.5	20	15	31	27	14.5	31	6	18.0	9.3	BMRJ-05	BMRJ-25
M25x1.5	25	8	33	29	17.3	33	6	20.4	10.7	BMRJ-EN-03	BMRJ-EN-23
PG 16	23	10	31	27	14.5	31	6	18.0	9.3	BSRJ-05	BSRJ-25
PG 21	29	11	35	33	18.5	33	6	22.9	12.2	BSRJ-06	BSRJ-26

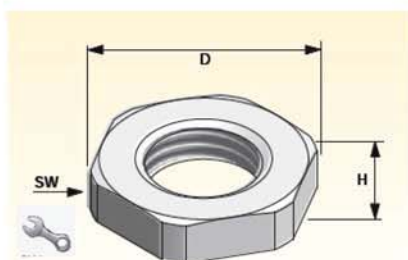

Technical Data

Materials

Lock Nut	Polyamide 6 30% Glass Fiber Reinforced
----------	---

Flammability UL 94 HB

Operating Temperature

Permanent	-20 C up to +100 C
Intermittent	-30 C up to +150 C

Thread Type	H mm	SW mm	D mm	Model	
				Dark Gray RAL7001	Black RAL9005
M20x1.5	6	26	28.6	BLMN-02	BLMN-22
M25x1.5	6	32	35.0	BLMN-03	BLMN-23
PG 16	6	30	33.0	BLN-05	BLN-25
PG 21	7	36	39.0	BLN-06	BLN-26